
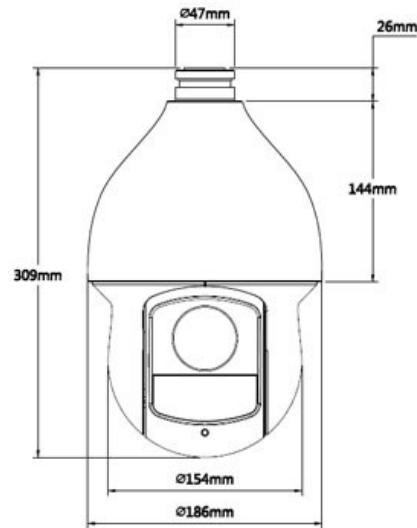


**CP- UNP-3041L10DA-P****4MP 30x WDR IP IR PTZ Dome Camera - 100 Mtr.****Main Features**

- 1/3" 4MP PS CMOS Image sensor
- Max. 25/30fps@4M, 50/60fps@1080P resolution
- Powerful 30x Optical and 16x Digital zoom
- H.265 and H.264 Triple Stream Encoding
- WDR (120dB), Day/Night (ICR), 2D/3D-DNR, EIS, ROI, Defog, Auto Iris, Auto Focus
- Up to 300 Presets, 8 Tour, 5 Pattern, Auto scan, Auto Pan
- Max 400°/s pan speed, 360° endless pan rotation
- Built-in 2/1 alarm in/out, IP66, PoE+ , Micro SD Card, 100 Mtr. IR
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro



# CP- UNP-3041L10DA-P

## 4MP 30x WDR IP IR PTZ Dome Camera - 100 Mtr.



### Feature

Image Sensor  
Effective Pixels  
S/N Ratio  
Minimum Illumination  
Focal Length  
White Balance  
Focus Control  
Angle of View  
Close Focus Distance  
Electronic Shutter  
AGC control  
Back Light Compensation  
Optical Zoom  
Digital Zoom  
Pan Travel  
Tilt Travel  
Presets  
Preset Speed  
Privacy Masking  
Special Features  
Power up Action  
Time Task  
Idle Motion  
Day/Night: IR Cut Filter  
Video Compression  
Video Streaming  
Frame Rate  
Bit Rate  
Motion Detection  
Audio Compression

### Specification

1/3" Progressive Scan CMOS  
2592(H) x 1520(V), 4 Megapixels  
More than 55dB  
Color: 0.05Lux@F1.6; B/W: 0.005Lux@F1.6; 0Lux@F1.6 (IR on)  
4.5mm ~ 135.0mm  
Auto, ATW, Indoor, Outdoor, Manual  
Auto / Manual  
H: 60° ~ 2.2°  
100mm~ 1000mm  
1/1s~1/30,000s  
Auto / Manual  
BLC / HLC / WDR (120dB)  
30x  
16x  
0° ~ 360° endless, Pan Speed: 0.1° ~ 300°/sec  
-15° ~ 90°, auto flip 180°, Tilt Speed: 0.1° ~200°/sec  
300  
Pan: 400° /s; Tilt: 300° /s  
Up to 24 areas  
IR Range of 100 Mtr.,Defog, ROI, EIS, Up to 300 Presets, 8 Tour, 5 Pattern, Auto scan, Auto Pan  
Auto restore to previous PTZ and lens status after power failure  
Auto activation of Preset/Pan/Scan/Tour/Pattern by preset-time  
Activate Preset/ Pan/ Scan/ Tour/ Pattern if there is no command in the specified period  
Auto (ICR) / Color / B/W  
H.265+/H.265/H.264+/H.264  
3 Streams  
Main stream: 4M/3M(1~25/30fps), 1080P/1.3M/ 720P(1~50/60fps) Sub stream1: D1/CIF(1 ~ 25/30fps) Sub stream2: 1080P/1.3M/720P/D1/CIF (1~25/30fps)  
H.265/H.264: 448K ~ 8192Kbps  
Support  
G.711a/G.711Mu/AAC/G.722 / G.726/G.729

**CP- UNP-3041L10DA-P****4MP 30x WDR IP IR PTZ Dome Camera - 100 Mtr.****Feature**

Audio In

Audio Out

ROI

Auto Tracking

Networking

IVS

Protocols

Alarm

Tracking Trigger Event

Max Remote Users

Smart Phone

Memory Slot

Operating Temperature

Weather Proof Standard

Dimension

Weight

Power Source

Power Consumption

**Specification**

1 Ch.

1 Ch.

Support

Support

RJ-45 (10/100Base-T)

Tripwire, Intrusion, Abandoned/Missing, Face Detection, Heat Map

IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x, ONVIF Profile S&amp;G, API

2/1 channel In/Out

Motion detection, Video tampering, Scene changing, Network disconnection, IP address conflict, Illegal Access, Storage anomaly

20 users

iPhone, iPad, Android Phone

Micro SD card 256GB

-40°C ~ 70°C (-40°F ~ +158°F) / Less than 95% RH

IP66

Φ186mm × 309mm

3.5 kg

AC24V/3A(±10%), PoE+(802.3at)

PoE: 13W, 20W (IR on), AC24V: 13W, 23W (IR on)